

Ordering Steps:


- Step 1: Select outline body thickness TQFP (1.0mm) or LQFP (1.4mm).
- Step 2: Choose packaging. Tray is standard. Tape and Reel is available.
- Step 3: Select plating requirements. RoHS Pb-Free or SnPb
- Step 4. Select options according to your application. See chart below.

Part Number Packaged in Tray (Standard)	Options				Applications					
	Plating	Daisy Chain	Dummy Die	Isolated Pins	Mounting Practice	Rework Solder Practice	Reflow Temperature Profiling	Continuity Test	Life Cycle Test	S.I.R. Test
LQFP120T15.7	SnPb	No	No	No	x	x				
LQFP120T15.7T	Pb-Free	No	No	No	x	x				
LQFP120T15.7-DE-D	SnPb	Yes	Yes	No	x	x	x	x	x	
LQFP120T15.7T-DE-D	Pb-Free	Yes	Yes	No	x	x	x	x	x	
LQFP120T15.7-ISO	SnPb	No	No	Yes	x	x	x			x
LQFP120T15.7T-ISO	Pb-Free	No	No	Yes	x	x	x			x

Part Number Packaged in Tape and Reel	Options				Applications					
	Plating	Daisy Chain	Dummy Die	Isolated Pins	Mounting Practice	Rework Solder Practice	Reflow Temperature Profiling	Continuity Test	Life Cycle Test	S.I.R. Test
LQFP120E13A15.7	SnPb	No	No	No	x	x				
LQFP120E13A15.7T	Pb-Free	No	No	No	x	x				
LQFP120E13A15.7-DE-D	SnPb	Yes	Yes	No	x	x	x	x	x	
LQFP120E13A15.7T-DE-D	Pb-Free	Yes	Yes	No	x	x	x	x	x	
LQFP120E13A15.7-ISO	SnPb	No	No	Yes	x	x	x			x
LQFP120E13A15.7T-ISO	Pb-Free	No	No	Yes	x	x	x			x

Visit www.TopLine.tv or email info@TopLine.tv for applications assistance.

Daisy Chain TQFP120, LQFP120 and QFP120

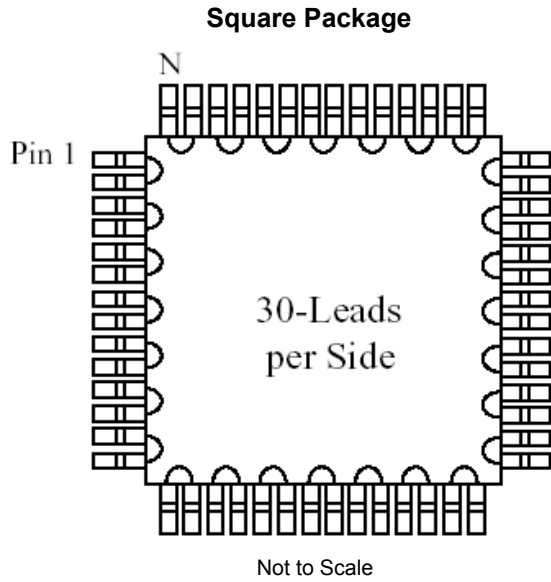

Daisy Chain Net List TQFP120, LQFP120 and QFP120

Net List		Net List		Net List	
From Pin	To Pin	From Pin	To Pin	From Pin	To Pin
1	2	41	42	81	82
3	4	43	44	83	84
5	6	45	46	85	86
7	8	47	48	87	88
9	10	49	50	89	90
11	12	51	52	91	92
13	14	53	54	93	94
15	16	55	56	95	96
17	18	57	58	97	98
19	20	59	60	99	100
21	22	61	62	101	102
23	24	63	64	103	104
25	26	65	66	105	106
27	28	67	68	107	108
29	30	69	70	109	110
31	32	71	72	111	112
33	34	73	74	113	114
35	36	75	76	115	116
37	38	77	78	117	118
39	40	79	80	119	120

Visit www.TopLine.tv or email info@TopLine.tv for applications assistance.