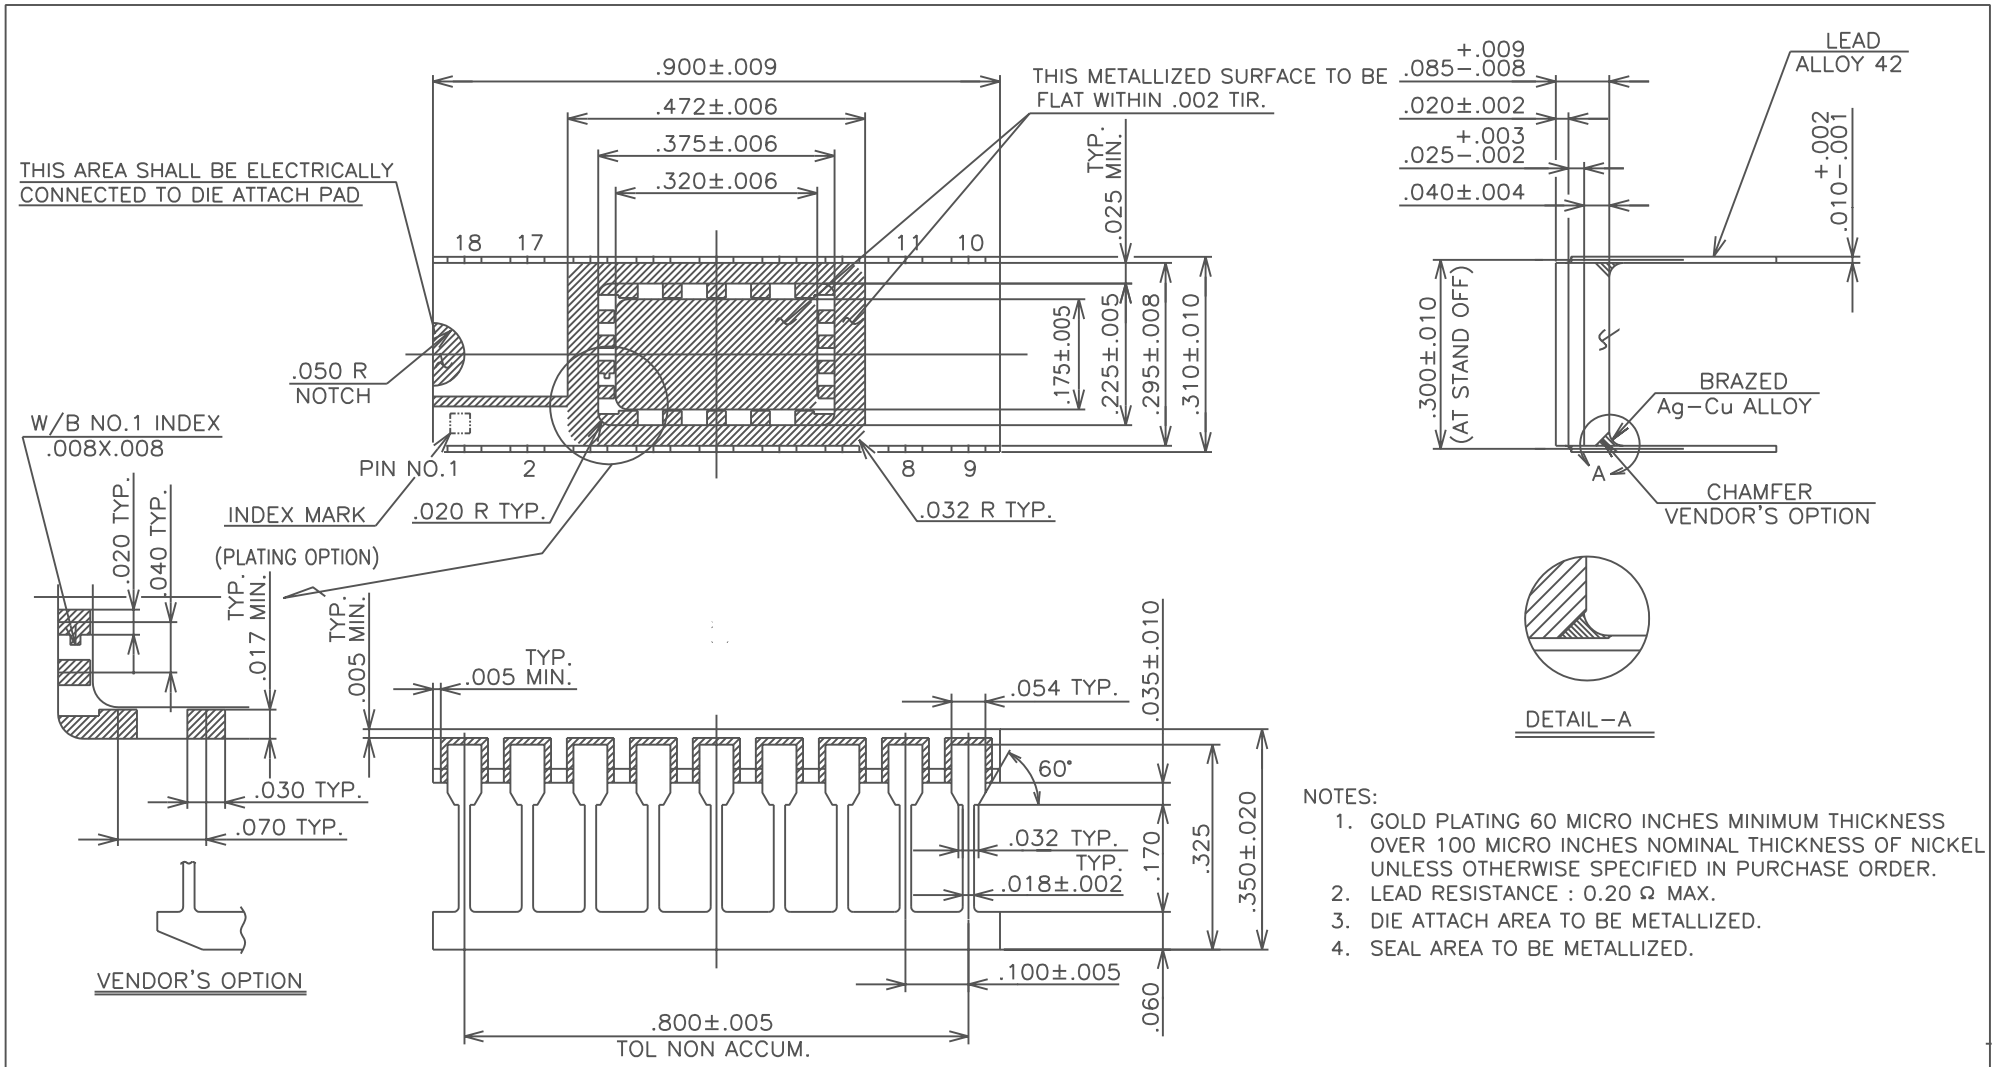

NOTES:

1. GOLD PLATING 60 MICRO INCHES MINIMUM THICKNESS OVER 100 MICRO INCHES NOMINAL THICKNESS OF NICKEL UNLESS OTHERWISE SPECIFIED IN PURCHASE ORDER.
2. LEAD RESISTANCE : 0.20 Ω MAX.
3. DIE ATTACH AREA TO BE METALLIZED.
4. SEAL AREA TO BE METALLIZED.

MODIFICATION						NAME	TOLERANCE	DWN	CKED	APPROVED	DATE
						18 LEAD SIDE BRAZED PAC	UNLESS OTHERWISE SPECIFIED	K.O			N.27.'77
						SCALE 5/1	MATERIAL AS INDICATED	THIRD ANGLE PROJECTION			
△F	REDRAWN :CONVERTED CAD DATA.	FEB.8.'00	Y.T	H.TA/S.NI	H			DRAWING NO.			SHEET 1
	CHANGED	DATE	DRAWN	CHECKED	APPROVED						