

GENERAL SPECIFICATIONS ARE COMPLIED WITH MIL-STD-750E AND SCREENED PER MIL-PRF-38354

- 1. MATERIAL: SEE BOM
- 2. FINAL FINISH:
 50" MIN GOLD OVER 100" MIN NICKEL, GOLD PLATING
 THICKNESS IS MEASURED AT THE CENTER OF
 EXTERNAL LEADS.
- 3. HERMETICITY: < 1 X 10-8 He/sec.
- 4. ASSEMBLY MUST EQUAL OR EXCED 10 9 OHMS ISOLITATION TEST WITH 500 VDC PINS TO CASE


	BILL OF MATERIAL						
ITEM	COMPONENT NAME	RAW MATERIAL					
1	BASE	OFHC COPPER					
2	FRAME	K□VAR					
3	PIN	COPPER CORED KOVAR					
4	CERAMIC EYELET	ENHANCED AL203 95%					

	<u>TopLine</u>						
TO254 6L							
1	SCALE	SIZE	DRAWING NO. REV				
	20:1	Α	167757		Α		
1	DO NOT SCALE DRAWING S			SHEET	OF 1		



GENERAL SPECIFICATIONS ARE COMPLIED WITH MILITARY STANDARD MIL-STD-750E

- 1. MATERIAL: KOVAR
- 2. FINAL FINISH: 2.54 µm MIN ELECTROLESS NICKEL PLATED
- 3. PARTS TO BE FREE FROM DIL, GREASE AND OTHER CONTAMINATES.

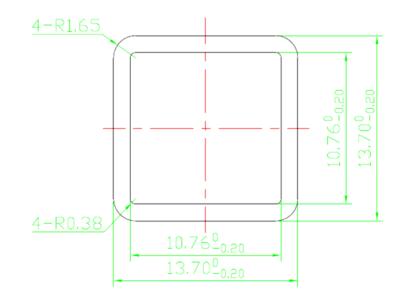

<u>TopLine</u>							
LID FOR TO254							
ELECTROLESS NICKEL PLATED							
SCALE	SIZE	DRAWING	NO.	REV			
20:1	Α	167760					
DO NOT SCALE DRAWING			SHEET	OF 1			