





[DC Home](#) - [My Member Info](#) - [Logout](#)

Radial Film Cap 5mm

Style A (Lead pitch 5mm)

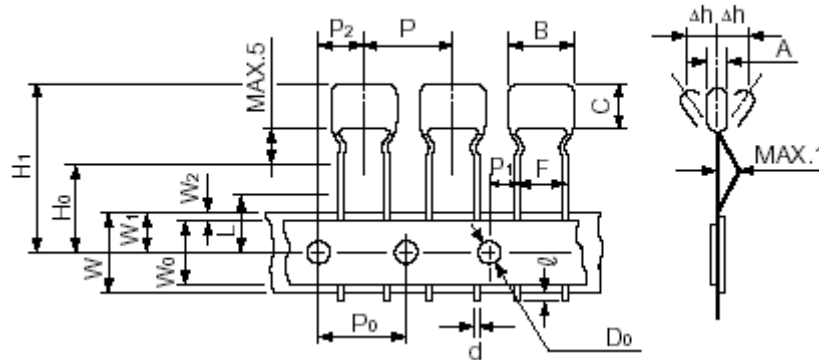

Style E (Lead pitch 7.5mm)

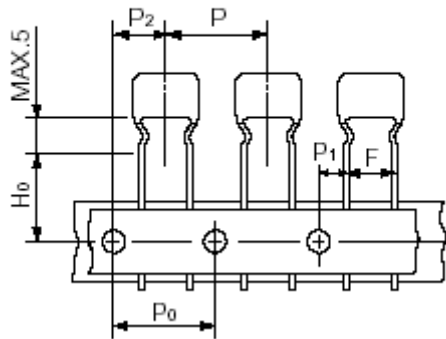

Item	Symbol	Dimensions (mm)					
		A	L	M	E	R	Tolerance
Pitch of component	P	12.7	15.0	25.4	15.0	30.0	± 1.0
Feed hole pitch	P0 _±	12.7	15.0	25.4	15.0	30.0	± 0.3
Feed hole pitch	P'0 _±	-	-	12.7	-	15.0	± 0.3
Distance between hole and lead wire	P1	3.85	5.0	3.85	3.75	3.75	± 0.7
Distance between hole and component	P2	6.35	7.5	6.35	7.5	7.5	± 1.3
Lead-to-lead distance	F	5.0	5.0	5.0	7.5	7.5	± 0.8
Tilt of component	Δh	0 ± 2.0					
Tape width	W	18 ± 0.08					
Hold-down tape width	W0	12.5 MIN.					
Slip out of hole	W1	9.0 ± 0.5					
Slip out of hold-down tape	W2	3.0 MAX.					
Lead-wire clinch height	H0	16.0 ± 0.5					
Length of cut lead	ℓ	2.0 MAX.					
Feed hole diameter	D0	4.0 ± 0.2					
Total tape thickness	t	0.7 ± 0.2					
Cut length of rejected component	L	11.0 MAX.					
Upper side position	H1	H0 + 5 + C					

[▶ Select Another Drawing](#)
[▶ Doc.Center Main Menu](#)
[▶ TopLine Home](#)

TopLine Corporation
 7331A Garden Grove Blvd
 Garden Grove, Ca 92841 USA
 Tel (800) 776-9888 Fax 1-714-891-0321

Contact Us: info@TopLine.tv