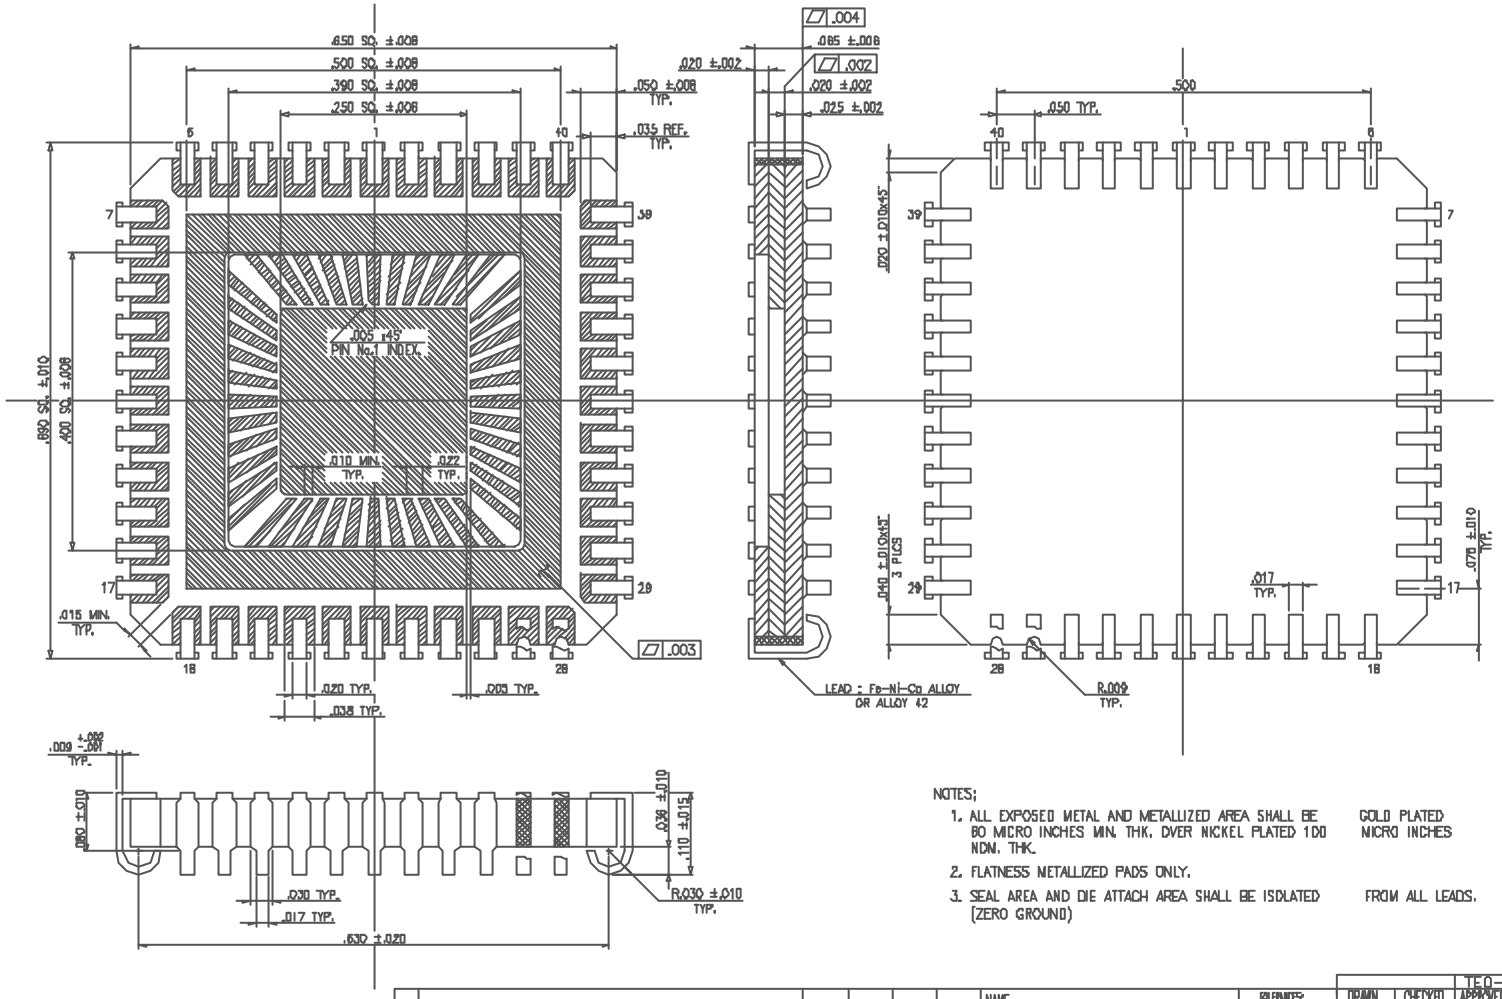

NOTES;

1. ALL EXPOSED METAL AND METALLIZED AREA SHALL BE 80 MICRO INCHES MIN. THK. OVER NICKEL PLATED 100 MICRO INCHES MIN. THK. — GOLD PLATED
2. FLATNESS METALLIZED PADS ONLY.
3. SEAL AREA AND DIE ATTACH AREA SHALL BE ISOLATED (ZERO GROUND) — FROM ALL LEADS.

MODIFICATIONS					
	CHANGE	DATE	DRAWN	CHECKED	APPROVED

NAME 44 CQFJ (.250 SQ. CAV.)

SCALE 10/1

MATERIAL KYOCERA A-44D

TOLERANCES: UNLESS OTHERWISE SPECIFIED ± .005

KYOCERA CORPORATION KYOTO JAPAN

DRAWN	CHECKED	APPROVED	DATE
A.S	T.J / T.D	K.J / S.J	85.30.86

TEO-44J

S=0 D=0

DRAWING NO. PB-F86079

SHEET 1/1