



## TO-126 PLASTIC PACKAGE

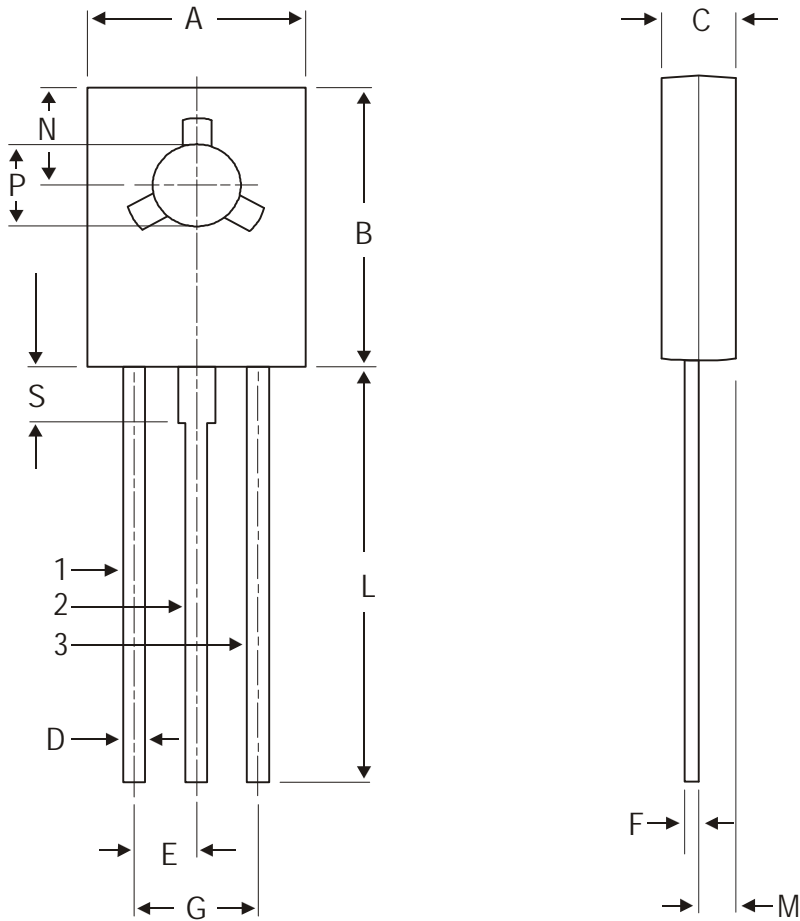

DIM	MIN	MAX
A	7.4	7.8
B	10.5	10.8
C	2.4	2.7
D	0.64	0.88
E	2.25 TYP.	
F	0.39	0.63
G	4.5 TYP.	
L	15.7 TYP.	
M	1.27 TYP.	
N	3.75 TYP.	
P	3.0	3.2
S	2.5 TYP.	




All dimensions are in mm

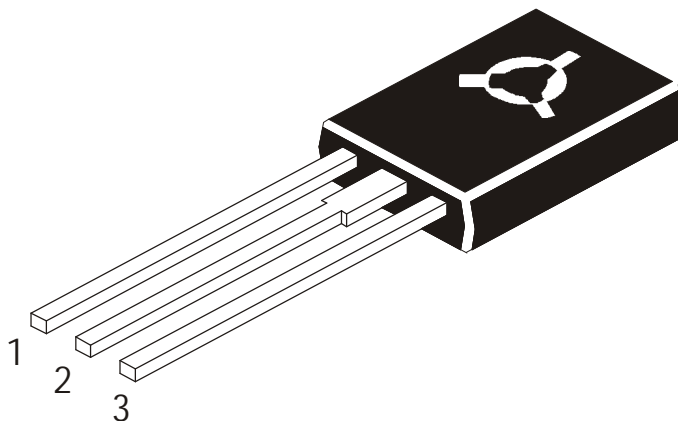

### Pin Configuration

1. Emitter
2. Collector
3. Base

**TO-126 TUBE PACKING**

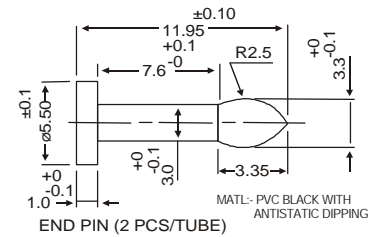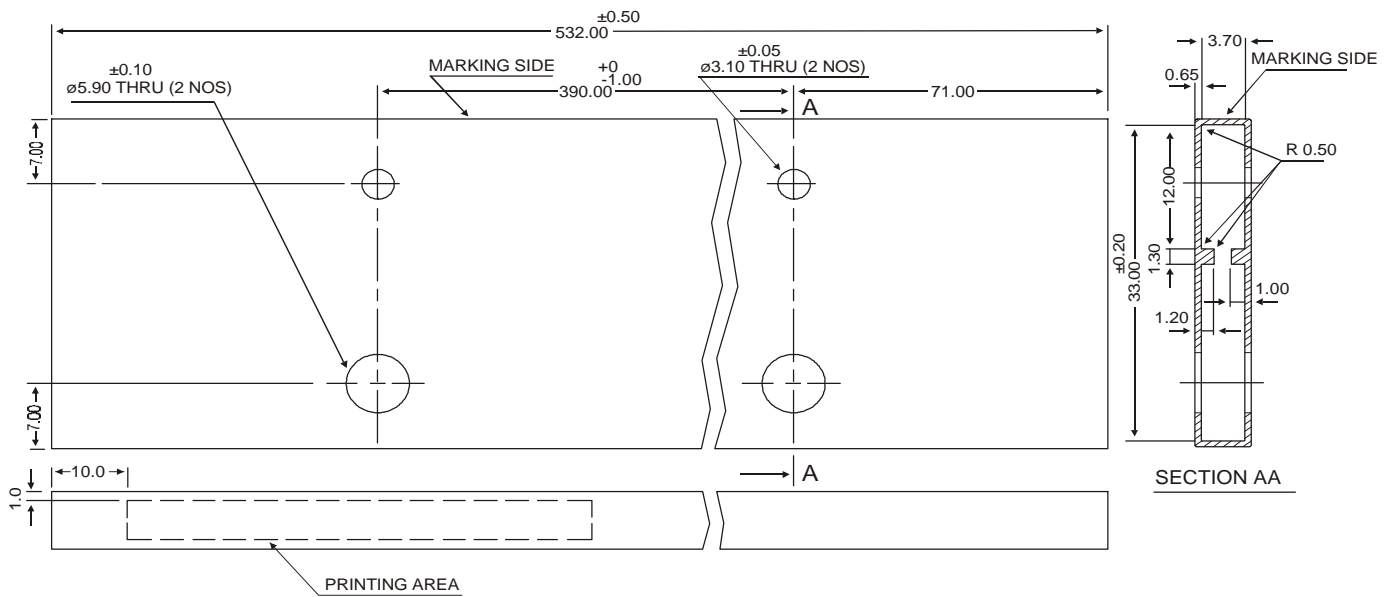


- Notes:**
1. All print in black.
  2. All text in Helvetia medium font.

GENERAL TOLERANCE					
0 mm	0.01 mm	30.01 mm	120.01 mm	ABOVE	ANGULAR
5 mm	30 mm	120 mm	315 mm	315 mm	
±0.1	±0.2	±0.3	±0.5	±0.8	±0' 30"

All dimensions are in mm

**AMMO PACK SIZE**

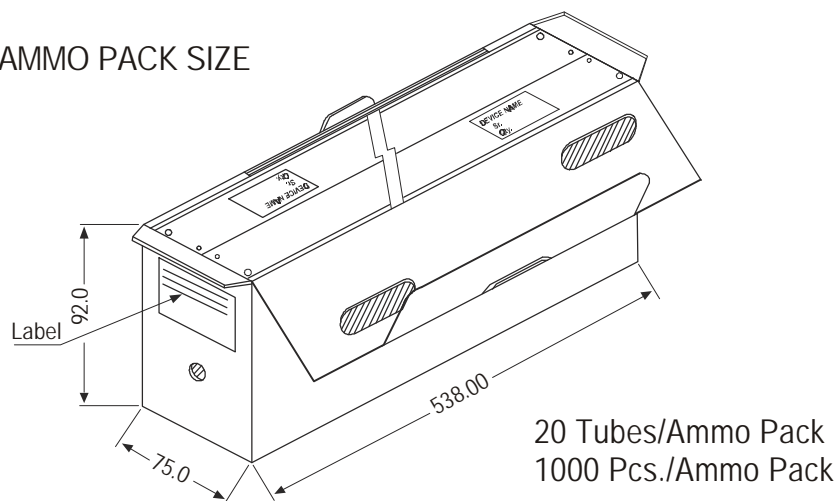

**Packing Details**

PACKAGE	STANDARD PACK		INNER CARTON BOX		OUTER CARTON BOX		
	Details	Net Weight/Qty	Size	Qty	Size	Qty	Gr Wt
TO-126 Bulk	500 pcs/polybag	340 gm/500 pcs	3" x 7.5" x 7.5"	2K	17" x 15" x 13.5"	32K	31 kgs
TO-126 Tube	50 pcs/tube	73 gm/50 pcs	3" x 3.7" x 21.5"	1K	19" x 19" x 19"	10K	15 kgs